

PUL 070D

70 MHz to L-Band Data Grade Upconverter (950-1450 MHz)

General Description:

The **PUL 070D** is an ultra-stable frequency converter based on Quintech's popular fixed channel converters. It features highly improved phase noise and stability performance that exceeds the IESS 308/309 standard, and is suitable for all current high-speed data transmission rates and advanced digital modulation schemes. It is capable of translating digital 70 MHz IF signals to any customer-specific L-Band channel. The channel frequency is factory preset.


Specifications:

Input Frequency:	70 MHz IF
Output Bandwidth (-3 dB):	36 MHz
Input Power Level:	-50 to -20 dBm
Overall Gain (Loss):	0 dB \pm 2 dB
Output Frequency:	Any customer-specified L-Band channel (950-1450 MHz), inverting or non-inverting
L.O. Stability:	\pm 1 ppm
Input Return Loss:	13 dB
Output Return Loss:	14 dB
Spurious:	-50 dBc
Phase Noise:	Offset (Hz) (dBc/Hz)
	10 -64
	100 -76
	1,000 -81
	10,000 -88
	100,000 -99
	1,000,000 -106
Output Connector:	Type "F", 75 Ω
Input Connector:	BNC, 75 Ω
Power Requirements:	100-240 VAC, 50/60 Hz
Power Consumption:	17 W
Operating Temperature:	+10 $^{\circ}$ to +60 $^{\circ}$ C
Mechanical:	1 RU (1.75" H x 19" W x 12.5" D)
Weight:	7.5 lbs. gross (boxed), 5.0 lbs. net



250 Airport Road • Indiana, PA 15701 • (800) 839-3658 • (724) 349-1412 • Fax: (724) 349-1421


<http://www.quecinc.com/> • info@quecinc.com

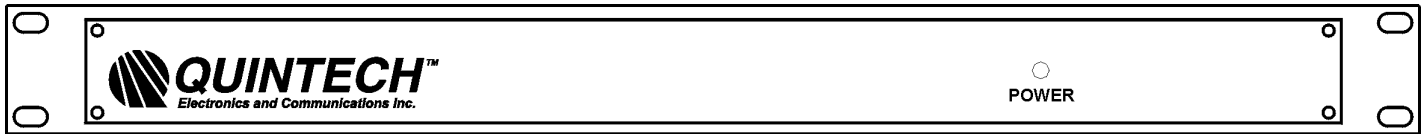

Special Instructions:

To utilize the PUL 070D, connect a 70 MHz signal to the "70 MHz" connector on the rear panel of the unit. The customer-specified L-band channel will be present at the L-BAND connector, also on the rear panel. Primary power required is 100-240 VAC, 2 Amp via the IEC AC connector.

NOTE: The PUL 070D has been designed for indoor use only. Opening the unit will immediately void the warranty.

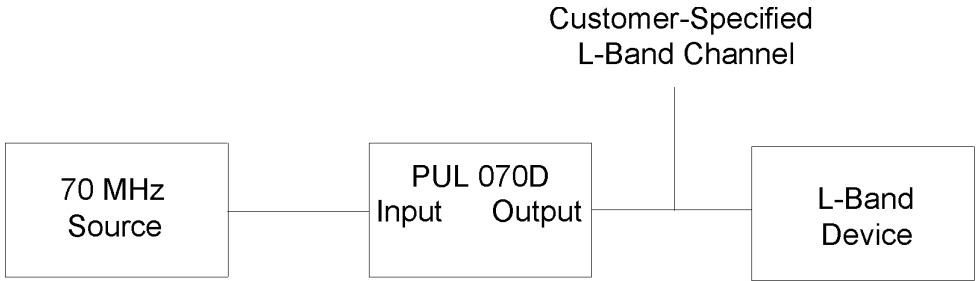

250 Airport Road • Indiana, PA 15701 • (800) 839-3658 • (724) 349-1412 • Fax: (724) 349-1421

<http://www.qecinc.com/> • info@qecinc.com